

C-COAT

by *Skyfol*®

**PROFESSIONAL CAR CARE
PRODUCTS, COATINGS AND
PAINT PROTECTION FILMS**



CLAY BAR FINE



C-COAT CLAY BAR FINE
Professional Clay Bar (Soft)

The perfect choice for removing stubborn, embedded contaminants such as tar, dust, particles, tree sap, etc., while preserving the paintwork.

For a flawless finish

Effectively removes a wide range of surface contaminants (from paintwork and glass) that regular car washing cannot eliminate. The clay material contains titanium, which helps correct minor surface imperfections.

How to Use:
After washing and drying the vehicle, begin working with the clay bar.
Mold it into a shape that fits comfortably in your palm.
Wet both the surface to be treated and the clay bar.
Gently glide the clay back and forth across the surface until it feels completely smooth.
Wipe the area with a microfiber towel.
Use clay lubricant to remove any remaining clay residue.
Finally, knead the clay until a clean surface is revealed for continued use.

Packaging: 2 pieces per box

C-COAT CLAY BAR COARSE
Professional Clay Bar (Hard)

CLAY BAR COARSE



C-COAT CLAY WATER
Clay Lubricant

The ideal formula for use with clay bars, clay towels, and clay mitts alike. Provides optimal glide, ensuring a fast, safe, and scratch-free clay-ing process from start to finish.

To be used with protective gloves

Available sizes: 473 ml and 4 L

C-COAT PREWASH
Pre-Wash

A mildly alkaline pre-wash with outstanding cleaning power. Effectively loosens dirt and grime without damaging the paintwork or ceramic coating.

How to Use:
Dilute the appropriate amount of C-Coat Pre-Wash according to the ratio indicated on the label.
Spray the solution onto the dry surface from a distance of 25-35 cm.
After 2-3 minutes, rinse thoroughly from bottom to top.
Finally, dry the surface using a microfiber towel.

Shake well before use.
Recommended dilution ratios:
For regular use: 1:50
For stubborn dirt: 1:10
For extreme surfaces (e.g. wheels): 1:5

Available sizes: 473 ml and 4 L



PREWASH

CLAY TOWEL



C-COAT CLAY TOWEL
Clay Towel (30x30 cm)

How to Use:
The Clay Towel and Clay Glove operate on the same principle as traditional clay bars, combining their effectiveness with greater comfort and faster application. They safely and gently remove stubborn, bonded contaminants without damaging the paintwork. The C-Coat Clay Towel and Clay Mitt leave the surface perfectly smooth and ready for the next step of detailing.



C-COAT CLAY MITT
Clay Glove

Clay Bar - Reinvented

The cleaning power of clay, now combined with even more comfort and speed!

CLAY MITT

SHAMPOO



C-COAT SHAMPOO
Concentrated Foam Shampoo

A pH-neutral, highly concentrated foam shampoo for car washing. Leaves no residue on the surface, making it ideal for pre-wrap cleaning.

Shake well before use.
Recommended dilution ratio: 1:1800
Available sizes: 473 ml and 4 L

How to Use:
Apply the properly diluted mixture to the surface using a wash mitt, working gently from top to bottom. Then rinse thoroughly with water and dry the vehicle with a microfiber towel.

SURFACE PREP



C-COAT SURFACE PREP
Surface Preparation Cleaner
Alcohol-free cleaning

The ideal degreaser for film installation or ceramic coating application – effective and alcohol-free. Using alcohol-based cleaners may prevent proper bonding of ceramic coatings to the cleaned surface. C-Coat Surface Prep contains no alcohol, yet effortlessly removes contaminants, making it the perfect choice for surface preparation before wrapping or ceramic coating.

Leaves a flawless, streak-free shine and works exceptionally well on glass too.

Available sizes: 473 ml and 4 L

C-COAT GLASS POLISH
Glass Polishing Compound

Effectively removes stubborn deposits, oxidation, and contaminants bonded to glass surfaces that regular glass cleaners can't handle. Eliminates fine scratches for a spotless, crystal-clear finish and improved visibility—especially in rainy conditions.

Do not use on hot surfaces or on chipped or damaged glass.

Available size: 300 ml

How to Use:
Apply the compound to a hard or medium-hard polishing pad. Polish the glass using overlapping motions. When using a machine polisher, avoid overheating the surface.



GLASS POLISH

C-COAT BUG OFF
Bug Remover Spray

A highly effective solution that easily dissolves insect residues and other organic contaminants from paintwork, as well as from vehicle wrap, paint protection film, and externally applied window films. For best results, use before applying the Prewash pre-cleaner.

How to Use:
Spray the contaminated surface and let it sit for 5 minutes. Then wash the car with a pre-wash shampoo. Safe for use on paintwork, vehicle wraps, and paint protection films.

Ready to use - do not dilute.
Warning: Do not apply the product to hot surfaces or in direct sunlight.

Available size: 750 ml



BUG OFF
DE-TACK



C-COAT DE-TACK
Adhesion-Reducing Solution for Air-Channelled Paint Protection Films

C-Coat De-Tack is a specially formulated solution designed to reduce the tack of air-channelled, colored paint protection films during dry installation. It allows for easier positioning of the film, making the installation process faster and more manageable.


Reduces adhesive tack, making it easier to align and reposition the film.

Helps prevent striping caused by stretching, repositioning, and squeegeeing.

Available size: 473 ml

How to Use:
Apply the solution using a C-Coat Applicator and spread it evenly across the entire surface, avoiding the edges (leave about a 1 cm margin). Wait until the surface is completely dry before starting the film installation.

GLASS PAD

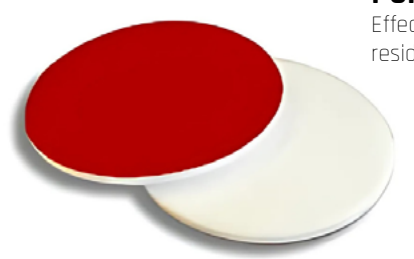

C-COAT GLASS PAD
Polishing Pad for Machine Use

Effectively removes stubborn, greasy contaminants and silicone residues from glass surfaces with ease.

Washable and reusable.

Equipped with a hook-and-loop (Velcro) backing for universal fit.



C-COAT GLASS BAR
Hand Polishing Pad for Glass Surface Preparation

Applicator block designed for manual glass polishing, ideal for edges and corners where machine polishers cannot reach. Gently yet effectively cleans without scratching.

Packaging: 4 pieces per pack

GLASS BAR

C-COAT FILM-ON
Professional PPF Installation Gel

C-Coat Film-On makes paint protection film installation faster, cleaner, and more consistent. Thanks to its special formulation, it allows the film to glide smoothly, making positioning and repositioning easy and precise. Its advanced viscosity promotes even moisture distribution and reduces surface tension – helping to prevent squeegee marks and minimizing air bubbles and wrinkles. Using Film-On significantly simplifies and speeds up the installation process while ensuring a flawless, premium-quality finish.

Recommended dilution: Add a minimum of 6 ml of installation gel to 2 liters of tap water. The amount of gel may vary depending on surface characteristics, temperature, and humidity.

Available size: 500 ml



FILM-ON



PROFESSIONAL CERAMIC COATINGS BY C-COAT

C-Coat ceramic coatings provide long-lasting protection for your vehicle—whether it's preserving the paintwork or enhancing the performance and extending the lifespan of paint protection film.

These coatings can be applied directly to painted surfaces or over PPF. Thanks to their hydrophobic properties, they offer excellent ease of cleaning and prevent contaminants from penetrating into the deeper layers of the paint or film.

GLASS

CERAMIC COATINGS

C-COAT GLASS

Creates an invisible water-repellent layer on the windshield.

Highly resistant to contaminants, making it extremely easy to remove bug residues or even ice.



How to Use:

Apply only to thoroughly cleaned glass using parallel or circular motions. Apply at least two layers for optimal performance. Immediately wipe off any excess after application, as the product cures instantly. If the excess becomes tacky and difficult to remove, lightly mist a high-quality glass cleaner onto a microfiber cloth and wipe gently. Allow the coating to dry for 2–4 hours before delivering the vehicle.

Resists Contaminants!

Bug splatter, dirt, and ice can be easily removed from the surface.

Crystal-clear, distortion-free visibility.

Reliable performance in all weather conditions.

Durability: up to 12 months

Available size: 50 ml

C-COAT VALUE

Entry-Level Ceramic Coating

Can be used for short-term paint protection or for annual maintenance of an existing C-Coat Pro coating.



Excellent Hydrophobic Effect!
Perfectly suitable for both paint protection films and vehicle wraps.

Very easy to apply.

Durability: up to 12 months.

Available size: 50 ml



How to Use:

Very easy to apply and just as quick and effortless to wipe off. Suitable for paintwork, plastic, chrome surfaces, and wheels alike. Its outstanding hydrophobic effect makes it especially ideal for protecting surfaces covered with paint protection film or vehicle wrap—where enhanced water repellency is a key priority.

C-COAT ELITE GRAPHENE

Premium-Grade Ceramic Coating – the flagship of the C-Coat range.

Extremely durable and chemically resistant, with a lifespan of up to 60 months. Offers exceptional protection against harsh contaminants and chemicals. Delivers a brilliantly glossy, ultra-hydrophobic surface that's easy to clean.

How to Use:

Apply in straight, parallel strokes—crosshatch application is not required. Can be wiped off immediately after application. Recommendation: Use with C-Coat Spreader and C-Coat Wiper for optimal results.

Extreme Stability!

Durability: up to 60 months

Available size: 50 ml



C-COAT PRO

Professional Ceramic Coating

Can be used either as a primary protective coating for paintwork or as biannual maintenance for an existing C-Coat Elite Graphene layer. Makes cleaning easier and provides long-lasting protection against contaminants.



How to Use:

As the product cures quickly, it is recommended to divide larger surfaces into smaller sections. Apply in straight, parallel strokes—crosshatch application is not necessary. Curing time: 24 hours.

Extremely Hydrophobic Effect!

Durability: up to 3 years

Fast curing time

Available size: 50 ml



PRO

RESTORE

C-COAT PPF RESTORE

Ceramic Coating for Paint Protection Film

A high-performance ceramic coating specifically developed for paint protection films. It enhances the film's gloss, improves water repellency, and protects the surface even against corrosive contaminants that can cause discoloration. It offers excellent protection against UV radiation and environmental pollutants, effectively extending the lifespan of the film.

How to Use:

Thoroughly clean and degrease the surface using C-Coat surface preparation products. Work in sections and apply the coating evenly. For larger areas (e.g. the hood), divide the surface into four parts. Wait 1–2 minutes, then wipe off the surface using a dry C-Coat Wiper. For optimal results, apply a second layer after 2 hours. Allow the treated surface to remain untouched for 12 hours to ensure full curing.

The vehicle can be safely driven after 2 hours.

Avoid water contact and touching the surface for 24 hours.

Do not wash the car for 7 days to allow the coating to fully cure.

Available size: 50 ml



ELITE GRAPHENE

JET WET COAT



C-COAT JET WET COAT
Easy-to-use concentrate

Enhances the gloss of the car body and forms a dirt-repellent, hydrophobic protective layer on the surface, which remains effective even three months after application.

How to Use:
Simple and quick – can be sprayed directly onto the still wet car after washing, then rinsed off immediately.

Dilution ratio:
With foam lance: 1:10
With hand foamer: 1:50

Suitable for use on paintwork, glass, ceramic coatings, paint protection film, and car wrap film.

Do not apply the product to hot surfaces or in direct sunlight!

Available sizes: 473 ml and 4 L

CERAMIC SEALANT



C-COAT CERAMIC SEALANT
Spray-on coating

Creates an extremely hydrophobic, smooth, and glossy finish on the vehicle surface. Enhances the performance of paint protection film and existing ceramic coatings.

How to Use:
Thoroughly clean the vehicle surface before use.

Dry application: Spray the product onto a microfiber towel or directly onto the surface.

Work one panel at a time using straight, overlapping strokes.

Immediately wipe off any excess with a separate clean towel.

Wet application: Dilute the product at a 1:20 ratio.

Spray onto the wet surface directly after washing the car.

Rinse off immediately with a pressure washer.

Do not use on hot surfaces or in direct sunlight!

Avoid exposing the vehicle to direct sunlight for approximately 2-3 hours after application.

Do not use any chemicals or cleaners on the surface within 24 hours, and try to keep the car dry during this period.

Shake well before use.

Available sizes: 473 ml and 4 L

C-COAT GRAPHENE SHAMPOO
Cleaning concentrate

A specialized shampoo enriched with graphene, designed for car care after wrapping. Provides an outstanding hydrophobic finish, helping to protect the film by reducing the need for mechanical contact during cleaning. Contains drying additives for easier and more efficient drying.

How to Use:
Rinse the car, then dilute C-Coat Graphene Shampoo according to the recommended ratio. Apply the mixture to the surface using a wash mitt, working from top to bottom with light pressure.
Rinse thoroughly with water, then dry the car with a microfiber towel.

Recommended dilution ratio: 1:50 - 1:100

Available sizes: 473 ml and 4 L



SHOOPHOS

APC



C-COAT APC
ALL PURPOSE CLEANER - the versatile cleaning solution

Offers a wide range of applications for both interior and exterior surfaces. Suitable for use on metal, plastic, dashboard elements, leather, rubber, and even fabric.

How to Use:
Shake well before use. Spray the product onto the surface. Use a C-Coat Brush detailing brush to spread the cleaner evenly.
Thoroughly agitate the surface multiple times to ensure full coverage, including gaps and recesses.
For stubborn dirt, apply more pressure with the brush and repeat the process as needed. Wipe off with a microfiber towel.

Dilution ratio:
1:10 - 1:50 (depending on the level of contamination)

Available sizes: 473 ml and 4 L



C-COAT SPREADER

Microfiber applicator glove specially designed for applying ceramic coatings

Extremely light, fast, and efficient to work with. It doesn't shed lint, leaves no streaks, and doesn't absorb too much liquid, allowing you to save on coating material. Machine washable with a neutral detergent. Do not use fabric softener or bleach.

Lint-free

Streak-free


Low absorbency

One box (3 pieces) is usually enough for a full car application



SPREADER

GLASS TOWEL

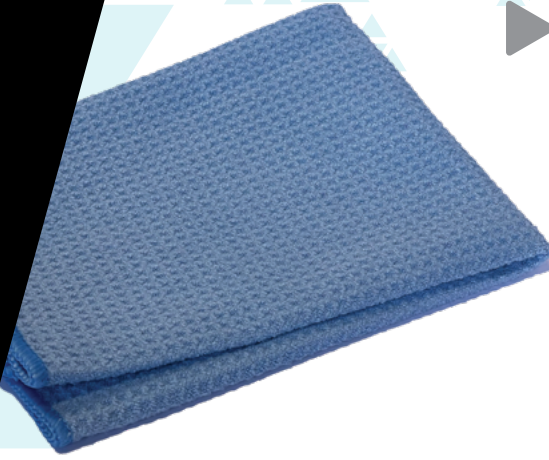

C-COAT GLASS TOWEL

Wipe cloth developed for automotive glass

Water-repellent towel specifically designed for car windows, ensuring a streak-free shine. Safe to use – does not scratch the surface. Easy to clean and extremely durable.

Size: 38 × 38 cm

APPLICATOR



C-COAT APPLICATOR

The classic ceramic coating sponge

Designed for those who prefer working with the familiar, tried-and-tested traditional applicator sponge. The C-Coat Applicator features a soft and a firm side, making it suitable for various application processes as needed.

Available in a pack of 12

C-COAT DRYING TOWEL

Ultra-absorbent drying towel

An extremely efficient drying towel that quickly and streak-free dries your car. Easy to clean and highly durable.

Size: 90 × 60 cm

DRYING TOWEL



WIPER BLACK & RED

C-COAT WIPER BLACK & RED

Premium microfiber towel

One side features short fibers, the other long fibers. Machine washable with a neutral detergent. Do not use fabric softener or bleach.

For a full car, typically 6-8 towels are needed

Size: 40 × 40 cm



C-COAT WASH MITT

Washing mitt

An essential wash mitt, easily slipped onto the hand for convenient use. Its soft material is safe for paint, film, and ceramic coatings. Easy to clean after use and extremely durable.



WASH MITT
TOWEL

C-COAT TOWEL

Universal microfiber towel

Short-pile universal towel for both interior and exterior cleaning – especially effective for removing coatings.

Available in a pack of 20

Size: 40 × 40 cm



C-COAT DETAILING TOWEL

Universal microfiber towel

A soft towel suitable for all stages of car care. Easy to clean, lint-free, and extra soft.

Size: 40 × 40 cm



DETAILING
TOWEL

C-COAT AREA DETAIL BRUSH

Extra-soft cleaning brush

Recommended for the efficient and quick cleaning of larger surfaces. Features an ergonomic, rubberized handle, extra-soft bristles, and a metal-free construction, making it safe to use even on delicate surfaces. Comes with a drying and storage stand.




AREA
DETAIL
BRUSH

C-COAT WIPER GREY

Microfiber towel for coatings

Premium-quality microfiber towel designed to easily remove ceramic coating residue.

Size: 40 × 40 cm

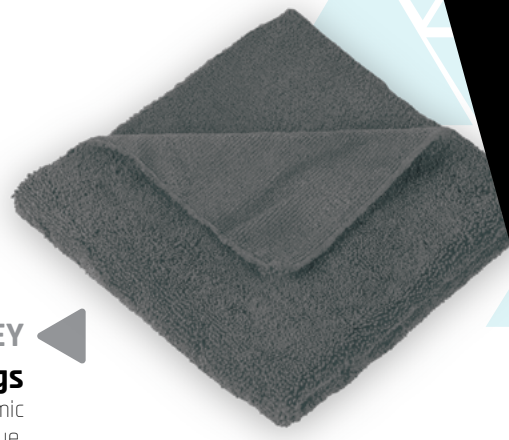

WIPER
GREY
MAGIC
SPONGE

C-COAT MAGIC SPONGE

Cleaning sponge

A universally applicable white cleaning sponge that instantly removes dirt, stains, and streaks from interior surfaces. Also suitable for cleaning wrap films.

Important: Always test on a less visible area before using on leather surfaces, as it may cause discoloration on freshly dyed leather.

Size: 11 × 7 × 4 cm



C-COAT WHEEL WOOLIES
Multifunctional wheel and rim cleaning brushes

A multifunctional set of wheel and rim cleaning brushes with wool heads, available in three different sizes to ensure all dirt and grime can be thoroughly reached and removed.



WHEEL WOOLIES

BRUSH



C-COAT BRUSH
Brush set

Premium-quality multifunctional detailing brushes suitable for both wet and dry use. Ideal for delicate components and precise interior and exterior cleaning tasks.

Highly flexible yet durable bristles

Set includes 5 different sizes

C-COAT TIRE & CARPET BRUSH
Tire and upholstery cleaning brush

An excellent tool for cleaning tires and fabric upholstery. Its ergonomic design ensures fast and easy handling, while the non-slip grip provides safe and secure use.



TIRE & CARPET BRUSH

C-COAT
PAINT PROTECTION FILMS

In addition to premium car care products and ceramic coatings, the latest addition to the C-Coat lineup is now available: **C-Coat PPF paint protection film**, offered in two gloss and one satin finish. Each version stands out in its own category - and most importantly, **exceptional quality now comes with a highly competitive price.**

EXPLORE THE FULL RANGE AND DISCOVER THE ADVANTAGES THAT MAKE INSTALLATION MORE EFFICIENT AND THE FINAL RESULT FLAWLESS.



C-COAT PPF SATIN PAINT PROTECTION FILM

EXCEPTIONAL FLEXIBILITY, HIGH STAIN RESISTANCE, OUTSTANDING SCRATCH RESISTANCE
A NEW LEVEL OF STYLISH PROTECTION.




TECHNICAL FEATURES

Total thickness 190 μm

Gloss value > 11

Adhesion 1100-1300 gf/inch

Stretch 19-20 N

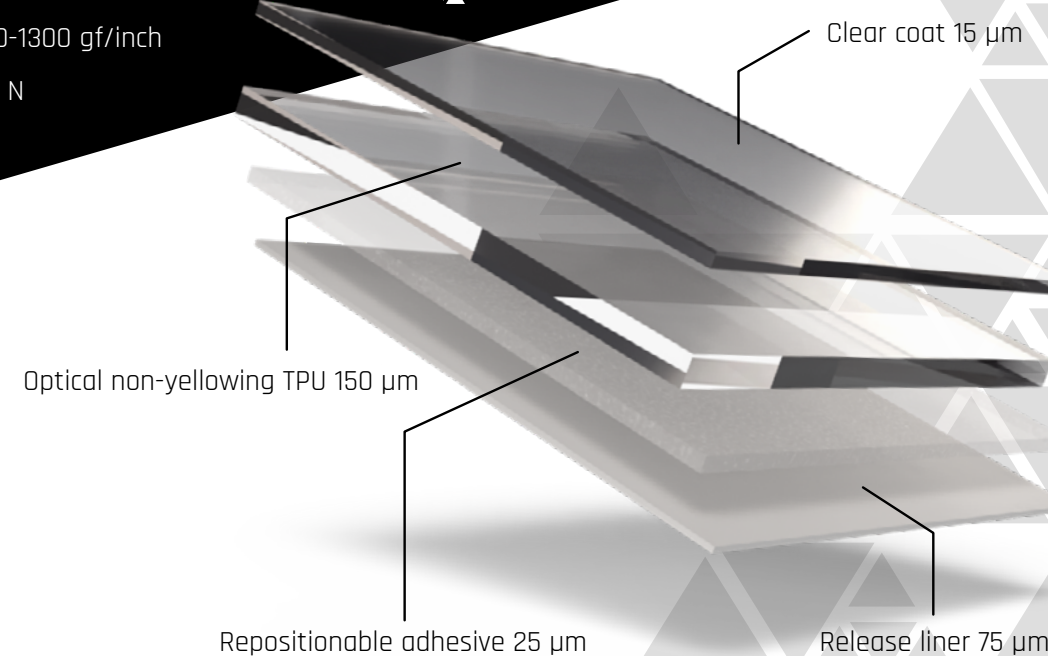

C-COAT PPF GLOSS PAINT PROTECTION FILM

SUPERIOR ADHESION, ULTRA-GLOSSY FINISH, EXTREME DURABILITY
THE PERFECT COMBINATION OF STRIKING APPEARANCE AND LONG-LASTING PROTECTION.




TECHNICAL FEATURES

Total thickness 190 μm

Gloss value > 95

Adhesion 1600-1800 gf/inch

Stretch 24-25 N

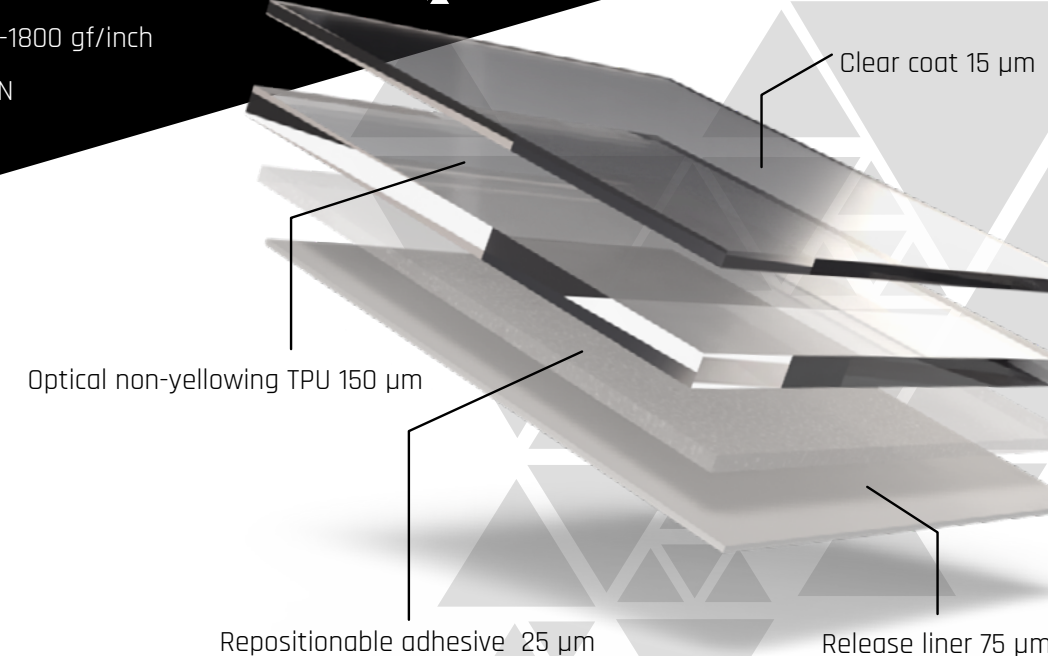

C-COAT PPF FLEX PAINT PROTECTION FILM

OUTSTANDING FLEXIBILITY, EASY HANDLING, INSTANT SELF-HEALING
GUARANTEED HASSLE-FREE INSTALLATION AND PREMIUM RESULTS.




TECHNICAL FEATURES

Total thickness 190 μm

Gloss value > 91

Adhesion 1400-1600 gf/inch

Stretch 19-20 N

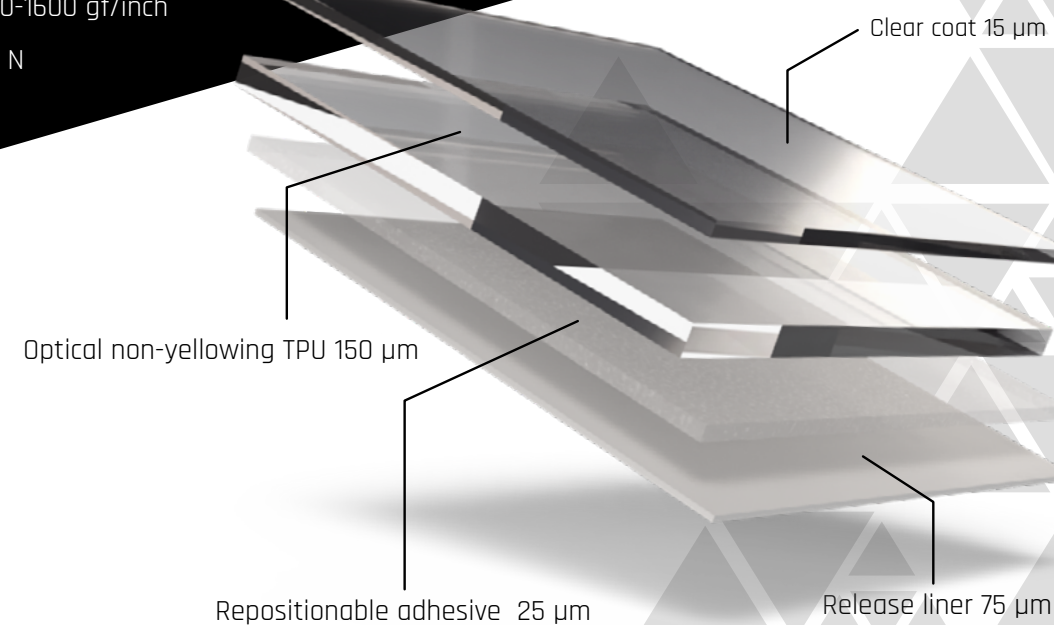

C-COAT by Skyfol
info@c-coat.eu



www.c-coat.eu