



Skyfol[®]
Film Solutions

PPF_{Nano 3 EVO}
paint protection film

Skyfol PPF Nano 3 EVO, thanks to its strong adhesive, provides outstanding tack right from the very start of installation – a feature that instantly makes it a favorite among installers. Its exceptional flexibility allows the film to adapt more easily to complex curves and shapes, ensuring quicker and more precise application. With its high-gloss, crystal-clear surface, the film adds an elegant shine to any vehicle, while the reinforced coating delivers enhanced resistance against everyday external impacts. Skyfol PPF Nano 3 EVO is therefore the perfect combination of uncompromising protection and superior aesthetics.



Outstanding flexibility



Excellent adhesion



Strong adhesive



High surface gloss



More durable coating




Self-healing feature

RAW MATERIAL

Skyfol PPF Nano 3 EVO is a biodegradable, polyester-based aliphatic thermo polyurethane film. As it is resistant to yellowing and UV, it is widely used for the exterior surface protection of vehicles.

STRUCTURE OF THE FILM (without cap sheet)

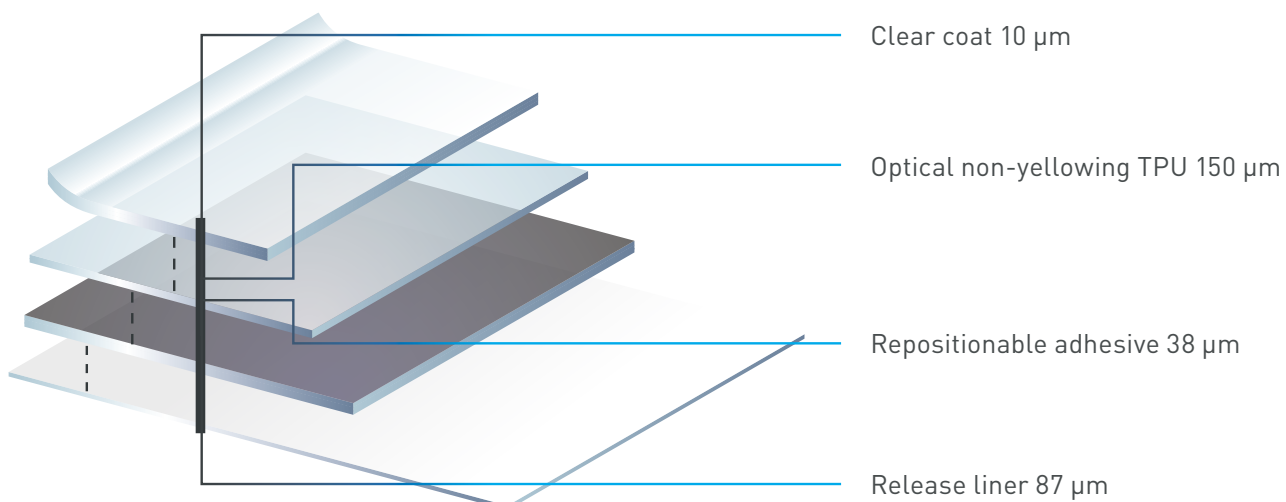



Skyfol®
Film Solutions

PPF Nano 3 EVO
paint protection film

TECHNICAL FEATURES

Thickness of the film:	198 micron
Gloss value:	>80
Adhesion (ASTM D3330):	900-1000 gf/inch
Stretch:	11,4 N
Adhesive:	Repositionable, non-yellowing, crystal-clear acrylic adhesive.
Resistance:	The film is resistant to general-use automotive fuels.
Shelf life:	1 year, stored optimally at 22°C and with relative humidity 50%.

TECHNICAL SPECIFICATIONS

technical data, recommendations, and other statements contained in this document are based on tests and experimental data that we believe to be reliable but whose accuracy and completeness are not guaranteed.

PRODUCT USE

in actual use, many of the factors beyond the control of Skyfol can affect the performance of the product. Due to the diversity of factors affecting product performance, it is entirely the responsibility of the user to make sure that the film is suitable for the actual use.

PRODUCT SAFETY

the product is an urethane film with residual solvent odour, but it does not release hazardous chemicals under normal use.

LIMITATION OF LIABILITY

with the exception of statutory prohibitions, Skyfol shall not be held liable for any direct, indirect, special or incidental loss or damage related to the Skyfol product, regardless of any legal, statutory (warranty, contract), negligence or objective liability.

WARRANTY

The installer assumes a 10-year warranty on the installation. The warranty period begins on the date of the invoice issued for the installation. The warranty applies only if installation is carried out on the original factory paintwork. The warranty is non-transferable and applies only to the original customer.

The warranty concerns surface cracks, bubbling, adhesive failure and delamination.

In case of problems due to material defects, Skyfol undertakes to replace the material, while the installer covers the cost of changing the film. The value of the claim shall not exceed the gross purchase price indicated on the invoice for the sale of the product. The warranty does not cover damage caused by improper use, accidents and normal wear and tear of the product, neither dents caused by stones and road debris.

Before installing the film on headlights, check local legal regulations that may vary by region. Skyfol does not warrant the Skyfol PPF Nano 3 EVO material installed on headlights, nor takes any liability for related fines.

The paint protection film can be ordered from official Skyfol distributors published at www.skyfol.com. Always consult the relevant Skyfol representatives who will inform you about roll sizes, minimum order quantities, prices and other business terms.

CONTACT

For the selection of the material and to receive technical assistance for application, visit our website at www.skyfol.com