

Skyfol DR35

Window film



Heat protection

Reduces radiant heat



UV protection

Protects your health and your valuables



Light protection

Glare is reduced



35 years of experience

One of the longest-operating distributors in the industry



Neutral appearance


Ideal in case of facade regulations



Manufacturer

Commonwealth Laminating & Coating, USA

Energy saving on various window systems

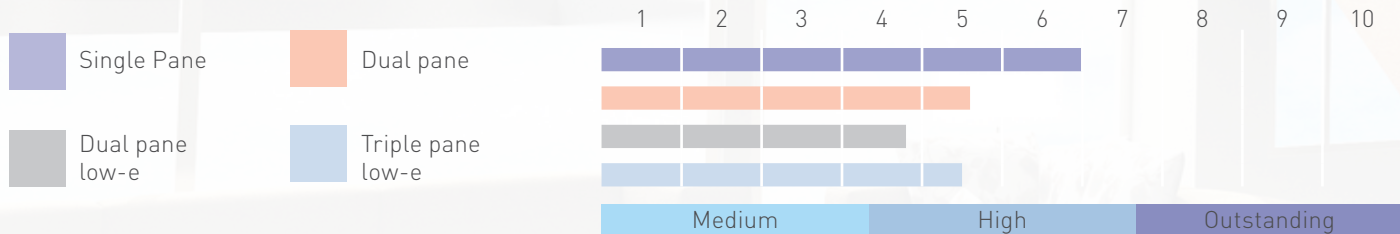

Save energy with window films!

	Single Pane	Dual pane	Dual pane low-e	Triple pane low-e
Total Solar Energy Rejected	60%	46%	38%	45%
Visible Light Transmitted	35%	32%	32%	29%
Visible Light Reflected Exterior	25%	27%	27%	31%
Visible Light Reflected Interior	18%	15%	15%	16%
Total Solar Energy Reflected	27%	27%	27%	27%
Total Solar Energy Absorbed	46%	48%	48%	51%
Total Solar Energy Transmitted	27%	25%	25%	22%
SHGC	0,40	0,54	0,62	0,55
UV Rejection	99%	99%	99%	99%
U-Value	5,96	2,77	1,49	1,19
Compatibility	Compatible	Compatible	Conditionally compatible	Not compatible



Interior/exterior

Interior



Thickness

38 microns (1.5 mil)



Adhesive

Pressure sensitive



Scratch Resistant Coating

2nd generation



Sizes available

1.52x30 m (60" x 100')



Warranty

10 years