



Energy saving

Saves money on cooling bills



35 years of experience

One of the longest-operating distributors in the industry



Heat protection

Rejects radiant heat



Efficient

High performance even on advanced glazings



Uniform temperature


Hot and cool spots are levelled off



UV protection

Protects your health and your valuables

Energy saving on various window systems

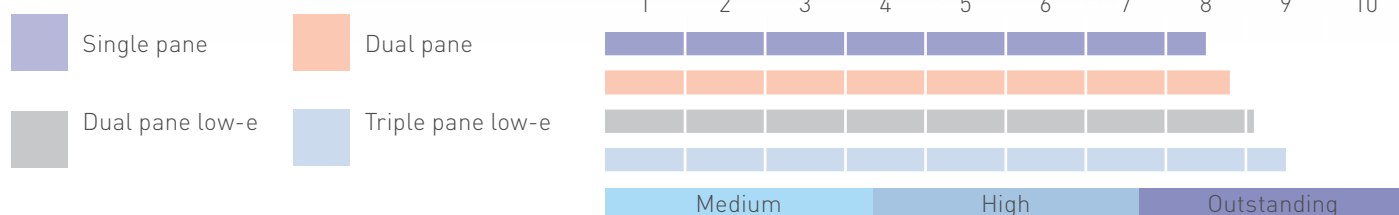

Save energy with window films!

Technical data	Single pane	Dual pane	Dual pane low-e (face 3)	Triple pane low-e (face 2 + 5)
Total Solar Energy Rejected	74%	78%	81%	85%
Visible Light Transmitted	20%	18%	17%	15%
Visible Light Reflected Exterior	37%	38%	38%	39%
Visible Light Reflected Interior	16%	15%	15%	15%
Total Solar Energy Reflected	41%	42%	47%	53%
Total Solar Energy Absorbed	43%	46%	43%	39%
Total Solar Energy Transmitted	16%	12%	10%	8%
SHGC	0.28	0.24	0.21	0.17
U-Value	5.64	2.8	1.1	0.7
UV Rejection	99%	99%	99%	99%



Scratch Resistant Coating

2nd generation



Sizes available

1,22x30 m, 1,52x30 m



Warranty

7 years on vertical windows
4 years on sloped windows



Interior/exterior

Exterior



Thickness

75 microns



Adhesive

Pressure sensitive