



Energy saving

Dramatic savings on cooling bills



Extreme heat protection

No sensation of heat behind the glass



Light protection

Glare is reduced



Privacy protection

Gives daytime privacy



Uniform temperature

Hot and cool spots are levelled off



For polycarbonate

Air permeable and removable



35 years of experience

One of the longest-operating distributors in the industry



Modern appearance

The building gets more beautiful



UV protection

Protects your health and your valuables


Energy saving on Single PC

Single pane
- XT05PC

Single pane
- XT15PC

Single pane
- XT30PC

Single pane
- XT70PC

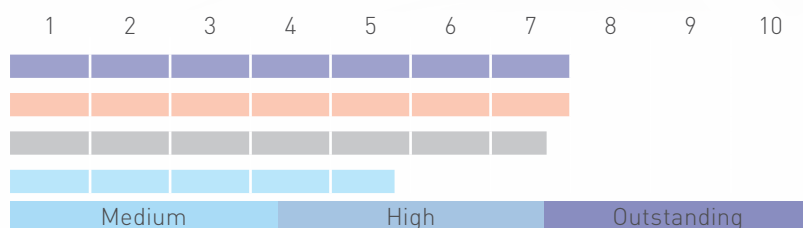

Save energy with window films!

	XT05PC	XT15PC	XT30PC	XT70PC
Total Solar Energy Rejected	70%	70%	66%	48%
Visible Light Transmitted	5%	15%	30%	70%
Visible Light Reflected Exterior	5%	5%	5%	8%
Visible Light Reflected Interior	5%	5%	5%	8%
Total Solar Energy Absorbed	85%	81%	67%	53%
Total Solar Energy Transmitted	8%	12%	26%	40%
SHGC	0.3	0.34	0.39	0.52
UV Rejection	≥99%	≥99%	≥99%	≥99%
U-Value	5.5	5.7	5.8	6.1



Interior/exterior

Exterior



Thickness

150 microns



Adhesive

Pressure sensitive



Scratch Resistant Coating

Self healing, scratch resistant coating



Sizes available

1,52x15 meters



Warranty

3 years